

Reduce inventory levels and cost by stocking actuators and base switches separately.**Contura II, III, IV, V, VI, VII, X, XI, XII, XIV Base switches separately:** specify **V** with code selections 2-8 in the ordering schemes.**Contura II, III, IV, V Actuator only:** **VV** with code **A** or **C** for selection 9, & with selections 10-14 in the ordering schemes.**Contura VI Actuator with lenses and inserts only:** **VV** with code selections 9-16**Contura II, III, IV, V, VII Actuator only:** **VV** with code **A, C, E, G, P** or **Z** for selection 9 & with selections 10-14 in the ordering schemes.**Contura X, XI, XII, XIV actuators with lenses separately:** **VV** with code selections 9-14 in the ordering schemes.**Panel Seal:** VPS**Contura X & XI actuators without lenses separately:**

VVR	6	1	00	1
-----	---	---	----	---

1	2	3	4	5
Actuator Separately	Actuator Style/Color	Lens Opening	Actuator Legend	Legend Orientation

1 CONTURA X & XI ACTUATOR SEPARATELY
VVR**2 ACTUATOR STYLE & COLOR**

	Black	Gray	White	Red
Contura X	1	2	3	4
Contura XI	6	7	8	9

3 LENS OPENING FOR ¹

1 One bar lens	5 square lens on top/ bar lens on bottom (Contura X only)
2 One bar lenses	
3 One square lens	
4 two square lens	


4 ACTUATOR LENS OR BODY LEGEND

00 - No Legend this location

11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O O	16 O O	17 O I	18 I O
F N	N F	F	

For additional legend options & codes, visit us at www.carlingtech.com.**5 LEGEND ORIENTATION ¹**

0	No legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4

**Contura X, XI & XII top piece of 2-piece lens separately:**

VVT	1
-----	---

1	2
Lens Separately	Color

1 TOP OF LENS SEPARATELY
VVT**2 COLOR**

1 Clear 2 Smoke 3 White

Contura X, XI & XII actuator lens assembly:

1 piece lens/bar lens are positioned the same as bottom lens for assembly, minus the top lens. Lenses snap in from bottom.

Notes:

- If actuator lens opening for 2 bar or 2 square lenses, legend orientation 0,1, or 2 must be chosen.
- Center of actuator marking not available for Contura XII.
- Legend is not available for bar style lens.
- Not recommended with neon lamps.
- Must also order top piece of 2 piece square lens separately.

Contura XII actuators without lenses separately:

VVP	J	1	Z	21	1	00
-----	---	---	---	----	---	----

1	2	3	4	5	6	7
Actuator	Style & Color	Lens Opening	Lens Opening	Legend	Legend Orientation	Legend Orientation

1 CONTURA XII ACTUATOR SEPARATELY
VVP**2 ACTUATOR STYLE & COLOR**

J Black K Gray N White M Red

3,4 LENS OPENING FOR


Z No lens 1 Bar lens 2 Square lens

5, 7 LENS OR BODY LEGEND ²

00 - No Legend	21 OFF	22 ON	23 O	24 I
	25 O F	26 O N	27 O	28 I

For additional legend options & codes, visit us at www.carlingtech.com.**6 LEGEND ORIENTATION ³**

0	No legend
1	Orientation 1
2	Orientation 2

**Contura X, XI & XII actuator lens assembly separately:**

VVL	2	1	00	0
-----	---	---	----	---

1	2	3	4	5
Lens Separately	Lens Style	Lens Color	Legend	Legend Orientation

1 CONTURA X, XI & XII LENS SEPARATELY
VVL**2 LENS STYLE ³**


1	Bar lens
2	One Piece Square lens
3	Bottom of Two-Piece Square lens ⁵

3 TRANSLUCENT LENS COLOR1 Clear 2 White 3 Amber 4 Green ⁴ 5 Red 6 Blue ⁴**4 LENS OR BODY LEGEND ²**

00 - No Legend	21 OFF	22 ON	23 O	24 I
	25 O F	26 O N	27 O	28 I

For additional legend options & codes, visit us at www.carlingtech.com.**5 LEGEND ORIENTATION ³**

0	No legend
1	Orientation 1
2	Orientation 2
3	Orientation 3
4	Orientation 4



Easily integrate Contura products into your system, with Contura Accessories



Contura Connectors

Q.C. SELECTION GUIDE					
COMPANY SERIES	PART NO		WIRE RANGE		ORIENTATION
	PLAIN BRASS	TIN PLATED BRASS	AWG	MM ² (REF)	
PACKARD 58 SERIES	02965580		12	3.0	B
	02965471	12010601	(2)16-14	(2)1.0-2.0	
	02965470		16-14	1.0-2.0	
	02965469	06288318	20-18	.5-.8	
PACKARD METRI-PACK 630 SERIES		12084590	10	5.0	A
		12052224	12	3.0	
		12015870	16-14	1.0-2.0	
		12020035	(2)22-18	(2).5-.8	
	12015832	12015869	20-18	.5-.8	
		12052222	20-22	.35-.5	
AMP 250 SERIES FASTIN-FASTON	60253-1	60253-2	16-12	1.3-3	B
	42100-1	42100-2	(2) 16	(2) 1.3	
			18-14	.8-2	
	60295-1	60295-2	22-18	.3-.9	


NOTE: Consult Delphi Packard and/or Amp on actual part numbers and availability.

AMP is a registered trademark of AMP Inc. Harrisburg, PA


Delphi Packard is a registered trademark of Delphi-Packard Electrical Systems Warren, Ohio

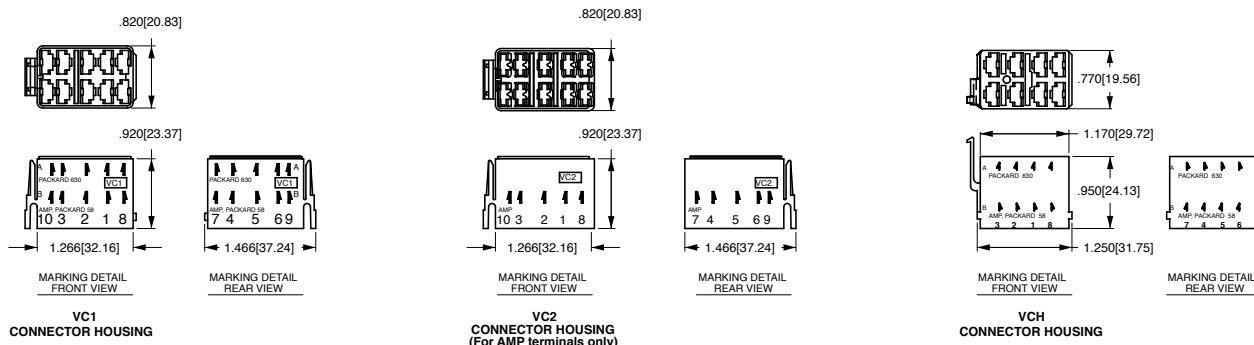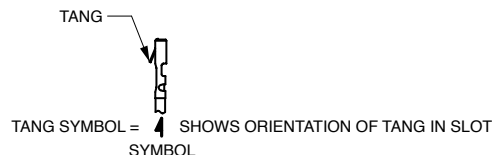

Contura X Boot (P/N VB1-01)



Contura II, III, IV & V Actuator Removal Tool (P/N VRT)

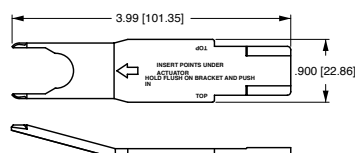

Additional V-Series Ratings

1	.4VA @ 28VDC Resistive
4	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, No Agency Listings
5 ¹	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, UL Recognized, CSA Certified
6 ²	15A 125VAC 1/2 HP, 12(2)A 125 VAC μ T85
7 ²	15A 125VAC 1/2 HP, 12(6)A 125 VAC T85
8 ²	10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(2)A 250 VAC μ T85
9 ²	10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(6)A 250 VAC T85
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuits 1, 4, A, & D only)
F	10A 14V, 6A, 14VT (circuit G only)
G	20A 6V
H	20A 3V
L	15A 125 VAC, 10A 250VAC, 1/2 HP 125-250 VAC; 6A 125 VAC L
M	.4VA/20A 12V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)
N	.4VA/15A 24V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)

NOTES


Consult factory to determine availability for individual circuits and their HP rating.

- Not available with Contura 7 or 14 rocker styles.
- Ratings 6 - 9 are UL, CSA & VDE certified, require terminations A or B for double pole circuits, & are not available with illumination circuits 4, 8, D, J, N, & T or with wire lead or solder lug terminations.

Circuits 1, 4, A, D, H, M & E are not available with rating 6 & 8. Rating 7 & 9 only available with circuits 1, 4, A & D. Circuits 2, 3, 5, 7, 8, K, L are 1/2 HP 250VAC only with rating 8. Ratings 6 & 7 must specify lamp code 1 (125VAC neon). Ratings 8 & 9 must specify lamp code 2 (250VAC neon). Rating L available with circuits 1, 4, A & D only.


Contura Mounting Panels

Dimensional Specifications: in. [mm]

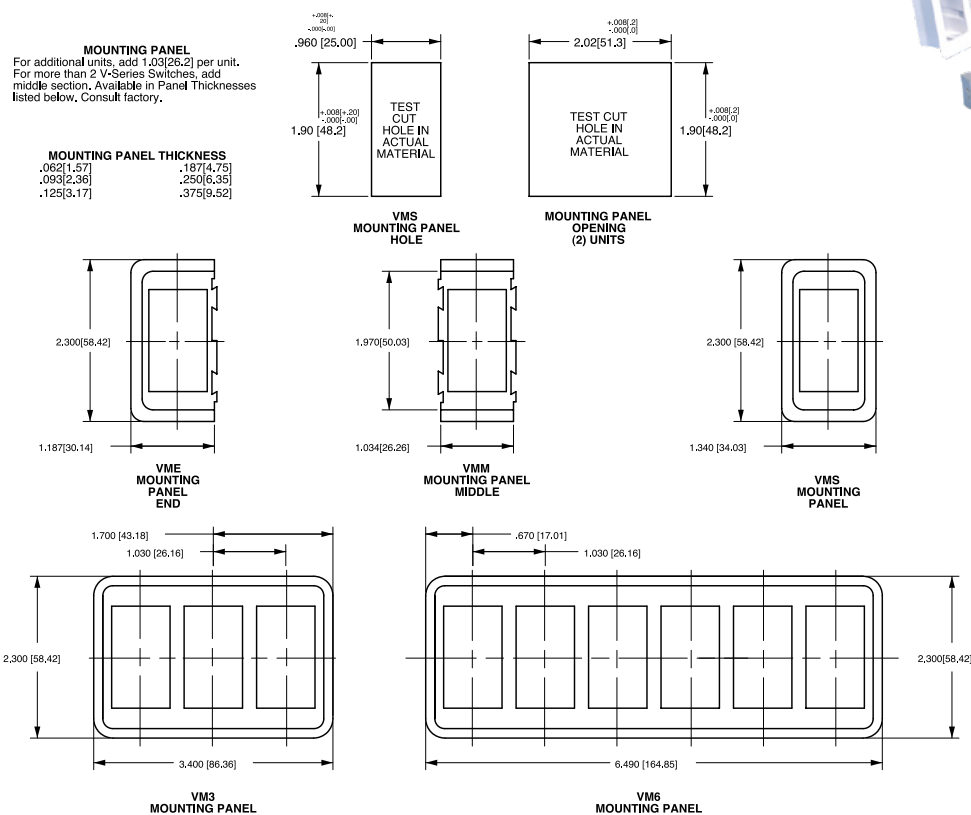

Contura Hole Plug

Dimensional Specifications: in. [mm]

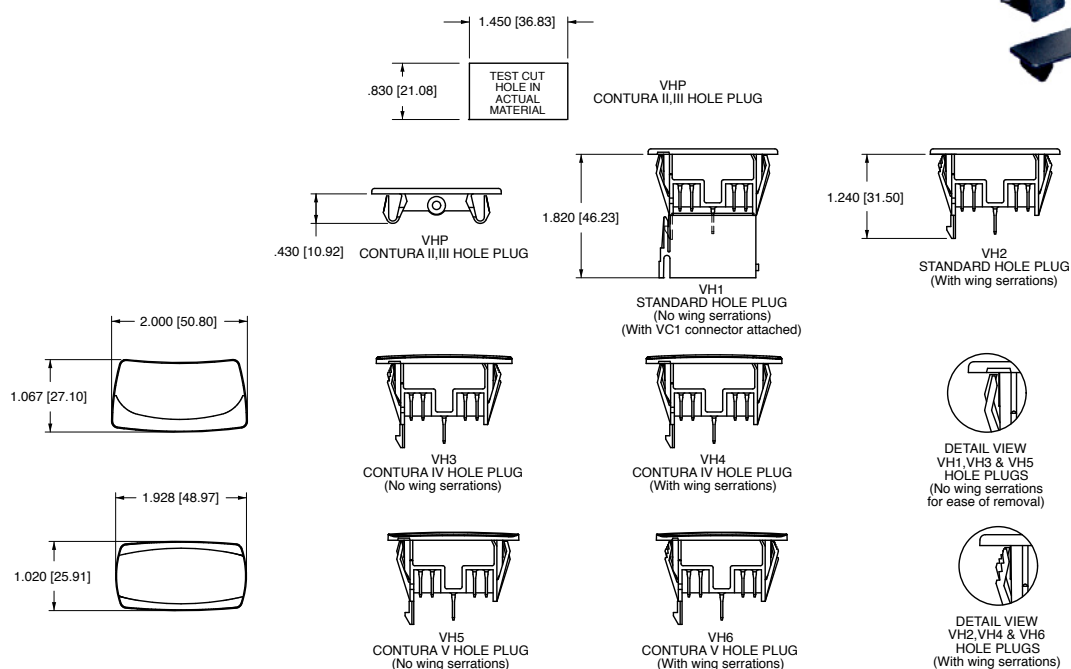

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carling Technologies:](#)

[VC1-01](#) [VH2-01](#) [VCH-01 CONNECTOR HOUSING BLACK](#) [VC2-01](#)